




ES100-24

BATTERY POWERED SPREADER

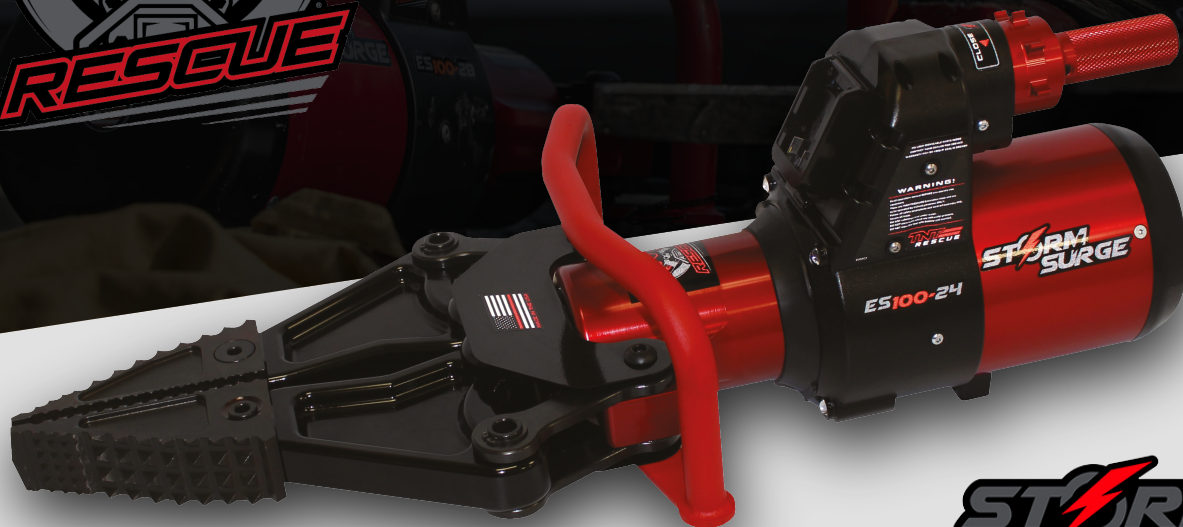

RELIABILITY

Designed to withstand the most extreme conditions.



BATTERY-POWERED (CORDLESS)

Technology delivering cordless mobility, extended runtime, and consistent power.

BUILT TO RESCUE

TECHNICAL SPECS

STANDARD

METRIC

LENGTH

32,43 in

823,77 mm

HEIGHT

11,15 in

283,09 mm

WIDTH

13,58 in

344,93 mm

WEIGHT (EXCL. BATTERY)

46,85 lb

21,25 kg

MAX. SPREAD DISTANCE

23,50 in

596,9 mm

MAX. SPREAD FORCE RANGE

64 476 - 242 368 lbf / 286 - 1078 kN

MAX. PULL DISTANCE

14,25 in

361,95 mm

MAX. PULL FORCE

14 368 lbf

63,91 kN

POWER SOURCE OPTION

Milwaukee® M18 / DeWalt® 20V / Makita® 18V/LXT

CERTIFIED TO NFPA 1960-2024

YES

IP RATING

IP54



PPE
SOLUTIONS

